

# RUNWAY FLEX OnOff

"When designing Runway, we took a holistic approach, starting from the effect of lighting by creating a family of both linear lighting creating general light and spotlights creating accent lighting. Tying it all together with the golden proportions, curvatures and connectivity. Design worthy the attention of a fashion runway."

Runway Flex is our most flexible general lighting fixture for modern, dynamic offices. Designed to enable individualized lighting over working areas/ workplaces, always aligned to the arrangement of workstations thanks to the fleibility of track mounting. The combination of efficient lens system and anti-glare louvres will ensure a pleasant general lighting with high visual comfort.

Rotation 355°.


Track mounted with 3-circuit universal adapter.



<b>Class of protection</b>	IP20, class I
<b>Colours</b>	White, black
<b>Weight total</b>	1200g
<b>Optics</b>	Lens+louvre
<b>Lifetime LED</b>	100 000h L90/B50 at Ta 25°C
<b>Driver h/max failure</b>	50 000h/10% at Ta 25°C
<b>Mounting</b>	3-circuit universal driver-adapter
<b>Voltage</b>	220-240V 50/60hz
<b>Qty/MCB 16A type B</b>	Max 60pcs (16W)
<b>Ripple out. current</b>	< 4%. Flicker-free performance
<b>Colour consistency</b>	2 SDCM
<b>Photobiological safety</b>	RG1
<b>Design</b>	Jesper Ståhl
<b>Dimming</b>	Not dimmable







- ☐ White
- ☒ Black

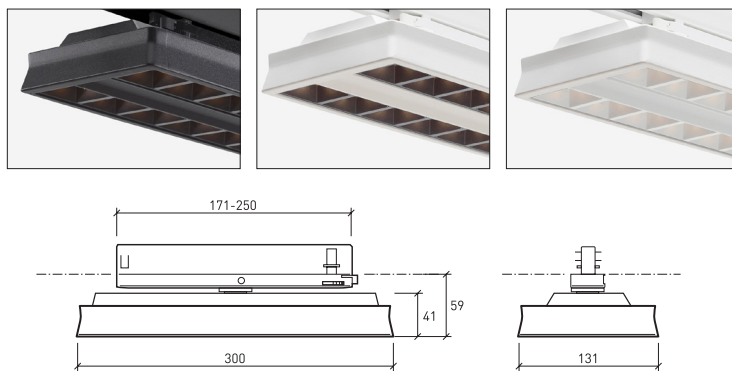

# RUNWAY FLEX OnOff

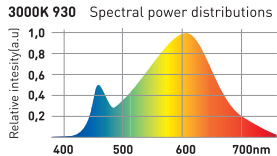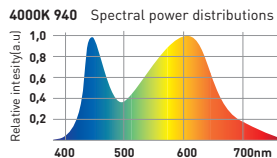

Description	Optic/louvre	CCT (K)	CRI	Load	Lumen	Lm/W	<input type="radio"/> White	<input checked="" type="radio"/> Black
LIGHTSOURCE				LUMINAIRE			ART. No.	
WARM WHITE 3000K (930)								
RUNWAY FLEX OnOff 2000lm 930	65°/Black louvre	3000K	92	18W	2090	116	<b>335100</b>	<b>335101</b>
RUNWAY FLEX OnOff 2000lm 930	65°/White louvre	3000K	92	18W	2090	116	<b>335104</b>	
								
NEUTRAL WHITE 4000K (940)								
RUNWAY FLEX OnOff 2000lm 940	65°/Black louvre	3000K	92	18W	2195	122	<b>335102</b>	<b>335103</b>
RUNWAY FLEX OnOff 2000lm 940	65°/White louvre	3000K	92	18W	2195	122	<b>335105</b>	
								

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of colour temperature: +/-150 K. Tolerance of CRI +/- 1,5. Values apply to an ambient temperature of 25°C.