


VINCI M PRO G2

"The VINCI family of spotlights is produced in a wide range of models for different needs and preferences. Vinci can be tailored to meet your requirements of the tone and spectral composition in the lighting. There is also a range of accessories available. Developed and produced in Sweden"


LED-spotlight with passive cooling system.
Die cast aluminium body, powder coat painted.
Integral heatsink. Integral premium driver.
Low ripple output current <4% to assure camera and scanner friendly performance.
Rotation 365°. Vertical adjustment +/- 90°.
Track mounted with 3-circuit adapter.



Class of protection	IP20, class I
Colours	White, black
Weight total	1600g
Reflector	High purity aluminium
Lifetime	50.000h L80/B10 at Ta 25°C
Mounting	3-circuit universal adaptor
Voltage	220-240V 50/60hz
Ripple out. current	< 4%. Flicker-free performance
Qty per MCB	Max 34pcs/MCB 16A type B
Colour consistency	3 SDCM
Photobiological safety	RG1
Design	Jesper Ståhl
Dimming	Not dimmable

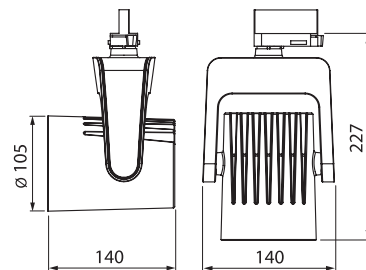

- White
- Black



Accessories

Protective glass	204590
Honeycomb louvre	204591

VINCI M PRO G2

Description	Reflector	CCT (K)	CRI	Lumen	Load	Lumen	Lm/W	○ White	● Black																																																																																																																																		
LIGHTSOURCE					LUMINAIRE			ART. No.																																																																																																																																			
WARM WHITE 3000K (930)																																																																																																																																											
Vinci M Pro 3000lm SP 930	Spot 15°	3000K	92	3530	27W	3130	116	245210	245214																																																																																																																																		
Vinci M Pro 3000lm ME 930	Medium 25°	3000K	92	3530	27W	3215	119	245211	245215																																																																																																																																		
Vinci M Pro 3000lm FL 930	Flood 40°	3000K	92	3530	27W	3145	116	245212	245216																																																																																																																																		
Vinci M Pro 5000lm SP 930	Spot 15°	3000K	92	5410	32W	4790	111	245310	245314																																																																																																																																		
Vinci M Pro 5000lm ME 930	Medium 25°	3000K	92	5410	32W	4930	114	245311	245315																																																																																																																																		
Vinci M Pro 5000lm FL 930	Flood 40°	3000K	92	5410	32W	4820	112	245312	245316																																																																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">Spot</th> <th colspan="4">Medium</th> <th colspan="4">Flood</th> </tr> <tr> <th colspan="2"></th> <th colspan="2">3000lm</th> <th colspan="2">5000lm</th> <th colspan="2"></th> <th colspan="2">3000lm</th> <th colspan="2">5000lm</th> <th colspan="2"></th> <th colspan="2">3000lm</th> <th colspan="2">5000lm</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,28</td> <td>19002</td> <td>29104</td> <td>1</td> <td>0,46</td> <td>11532</td> <td>17668</td> <td>1</td> <td>0,74</td> <td>5632</td> <td>8629</td> <td>1</td> <td>0,28</td> <td>19002</td> <td>29104</td> <td>1</td> <td>0,46</td> <td>11532</td> <td>17668</td> </tr> <tr> <td>2</td> <td>0,56</td> <td>4751</td> <td>7276</td> <td>2</td> <td>0,92</td> <td>2883</td> <td>4417</td> <td>2</td> <td>1,47</td> <td>1408</td> <td>2157</td> <td>2</td> <td>0,56</td> <td>4751</td> <td>7276</td> <td>2</td> <td>0,92</td> <td>2883</td> <td>4417</td> </tr> <tr> <td>3</td> <td>0,84</td> <td>2111</td> <td>3234</td> <td>3</td> <td>1,37</td> <td>1281</td> <td>1963</td> <td>3</td> <td>2,21</td> <td>626</td> <td>959</td> <td>3</td> <td>0,84</td> <td>2111</td> <td>3234</td> <td>3</td> <td>1,37</td> <td>1281</td> <td>1963</td> </tr> <tr> <td>4</td> <td>1,12</td> <td>1188</td> <td>1819</td> <td>4</td> <td>1,85</td> <td>721</td> <td>1104</td> <td>4</td> <td>2,91</td> <td>352</td> <td>539</td> <td>4</td> <td>1,12</td> <td>1188</td> <td>1819</td> <td>4</td> <td>1,85</td> <td>721</td> <td>1104</td> </tr> </tbody> </table>										Spot				Medium				Flood						3000lm		5000lm				3000lm		5000lm				3000lm		5000lm		m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	1	0,28	19002	29104	1	0,46	11532	17668	1	0,74	5632	8629	1	0,28	19002	29104	1	0,46	11532	17668	2	0,56	4751	7276	2	0,92	2883	4417	2	1,47	1408	2157	2	0,56	4751	7276	2	0,92	2883	4417	3	0,84	2111	3234	3	1,37	1281	1963	3	2,21	626	959	3	0,84	2111	3234	3	1,37	1281	1963	4	1,12	1188	1819	4	1,85	721	1104	4	2,91	352	539	4	1,12	1188	1819	4	1,85	721	1104
Spot				Medium				Flood																																																																																																																																			
		3000lm		5000lm				3000lm		5000lm				3000lm		5000lm																																																																																																																											
m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux																																																																																																																								
1	0,28	19002	29104	1	0,46	11532	17668	1	0,74	5632	8629	1	0,28	19002	29104	1	0,46	11532	17668																																																																																																																								
2	0,56	4751	7276	2	0,92	2883	4417	2	1,47	1408	2157	2	0,56	4751	7276	2	0,92	2883	4417																																																																																																																								
3	0,84	2111	3234	3	1,37	1281	1963	3	2,21	626	959	3	0,84	2111	3234	3	1,37	1281	1963																																																																																																																								
4	1,12	1188	1819	4	1,85	721	1104	4	2,91	352	539	4	1,12	1188	1819	4	1,85	721	1104																																																																																																																								
<p>3000K 930 Spectral power distributions</p>																																																																																																																																											
NEUTRAL WHITE 4000K (940)																																																																																																																																											
Vinci M Pro 3000lm SP 940	Spot 15°	4000K	92	3350	19W	2965	110	245250	245254																																																																																																																																		
Vinci M Pro 3000lm ME 940	Medium 25°	4000K	92	3350	19W	3050	113	245251	245255																																																																																																																																		
Vinci M Pro 3000lm FL 940	Flood 40°	4000K	92	3350	19W	2980	110	245252	245256																																																																																																																																		
Vinci M Pro 5000lm SP 940	Spot 15°	4000K	92	5355	32W	4740	110	245350	245354																																																																																																																																		
Vinci M Pro 5000lm ME 940	Medium 25°	4000K	92	5355	32W	4875	113	245351	245355																																																																																																																																		
Vinci M Pro 5000lm FL 940	Flood 40°	4000K	92	5355	32W	4770	111	245352	245356																																																																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">Spot</th> <th colspan="4">Medium</th> <th colspan="4">Flood</th> </tr> <tr> <th colspan="2"></th> <th colspan="2">3000lm</th> <th colspan="2">5000lm</th> <th colspan="2"></th> <th colspan="2">3000lm</th> <th colspan="2">5000lm</th> <th colspan="2"></th> <th colspan="2">3000lm</th> <th colspan="2">5000lm</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,28</td> <td>18012</td> <td>28794</td> <td>1</td> <td>0,46</td> <td>10934</td> <td>17478</td> <td>1</td> <td>0,74</td> <td>5341</td> <td>8537</td> <td>1</td> <td>0,28</td> <td>18012</td> <td>28794</td> <td>1</td> <td>0,46</td> <td>10934</td> <td>17478</td> </tr> <tr> <td>2</td> <td>0,56</td> <td>4503</td> <td>7199</td> <td>2</td> <td>0,92</td> <td>2734</td> <td>4370</td> <td>2</td> <td>1,47</td> <td>1335</td> <td>2134</td> <td>2</td> <td>0,56</td> <td>4503</td> <td>7199</td> <td>2</td> <td>0,92</td> <td>2734</td> <td>4370</td> </tr> <tr> <td>3</td> <td>0,84</td> <td>2001</td> <td>3199</td> <td>3</td> <td>1,37</td> <td>1215</td> <td>1942</td> <td>3</td> <td>2,21</td> <td>593</td> <td>949</td> <td>3</td> <td>0,84</td> <td>2001</td> <td>3199</td> <td>3</td> <td>1,37</td> <td>1215</td> <td>1942</td> </tr> <tr> <td>4</td> <td>1,12</td> <td>1126</td> <td>1800</td> <td>4</td> <td>1,85</td> <td>683</td> <td>1092</td> <td>4</td> <td>2,91</td> <td>334</td> <td>534</td> <td>4</td> <td>1,12</td> <td>1126</td> <td>1800</td> <td>4</td> <td>1,85</td> <td>683</td> <td>1092</td> </tr> </tbody> </table>										Spot				Medium				Flood						3000lm		5000lm				3000lm		5000lm				3000lm		5000lm		m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	1	0,28	18012	28794	1	0,46	10934	17478	1	0,74	5341	8537	1	0,28	18012	28794	1	0,46	10934	17478	2	0,56	4503	7199	2	0,92	2734	4370	2	1,47	1335	2134	2	0,56	4503	7199	2	0,92	2734	4370	3	0,84	2001	3199	3	1,37	1215	1942	3	2,21	593	949	3	0,84	2001	3199	3	1,37	1215	1942	4	1,12	1126	1800	4	1,85	683	1092	4	2,91	334	534	4	1,12	1126	1800	4	1,85	683	1092
Spot				Medium				Flood																																																																																																																																			
		3000lm		5000lm				3000lm		5000lm				3000lm		5000lm																																																																																																																											
m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux	m	Ø	Lux	Lux																																																																																																																								
1	0,28	18012	28794	1	0,46	10934	17478	1	0,74	5341	8537	1	0,28	18012	28794	1	0,46	10934	17478																																																																																																																								
2	0,56	4503	7199	2	0,92	2734	4370	2	1,47	1335	2134	2	0,56	4503	7199	2	0,92	2734	4370																																																																																																																								
3	0,84	2001	3199	3	1,37	1215	1942	3	2,21	593	949	3	0,84	2001	3199	3	1,37	1215	1942																																																																																																																								
4	1,12	1126	1800	4	1,85	683	1092	4	2,91	334	534	4	1,12	1126	1800	4	1,85	683	1092																																																																																																																								
<p>4000K 940 Spectral power distributions</p>																																																																																																																																											

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of colour temperature: +/-150 K. Tolerance of CRI +/- 1,5. Values apply to an ambient temperature of 25°C.